




ATTENTION! King size sleeper can be assembled on either side. Process is same, only change is what arm is removed and mirror the process.

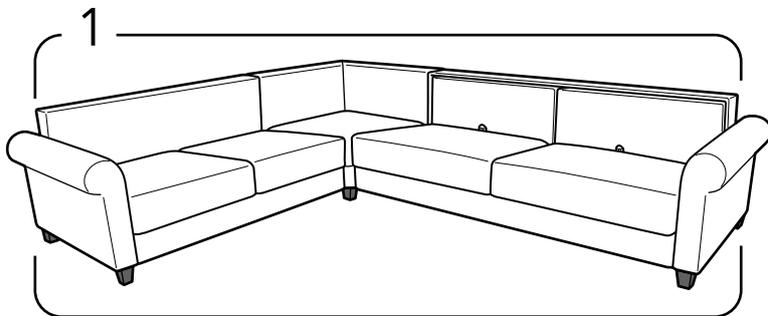


Remove all the back cushions.

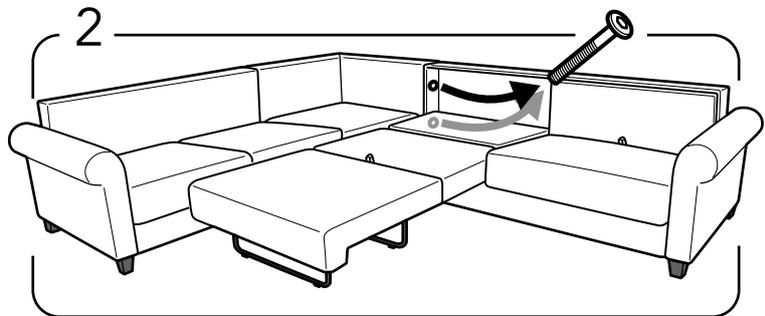


Open the bed mechanism, then remove 2 backrest fixing bolts.

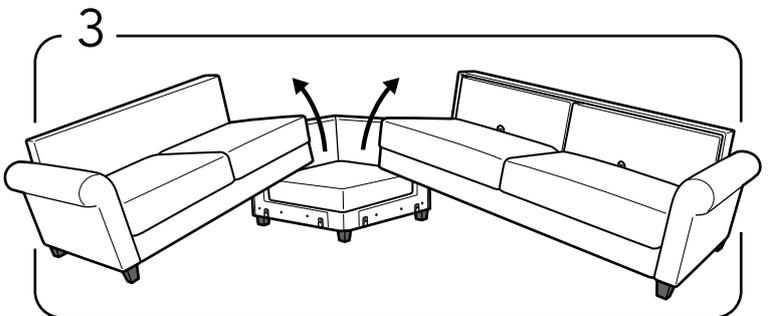


Close the bed mechanism and separate the 3 sofa parts.

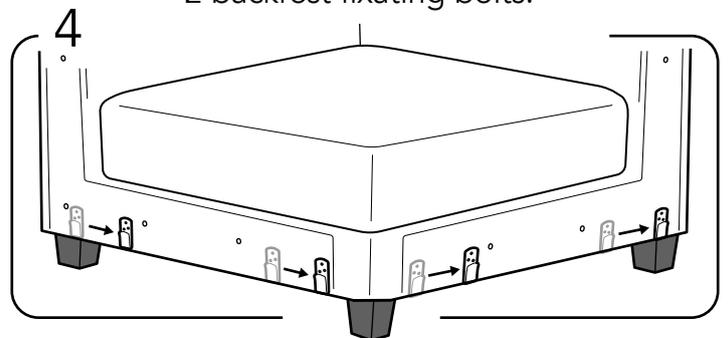


Re-position all the anchors as shown in the image above in the pre-drilled holes.

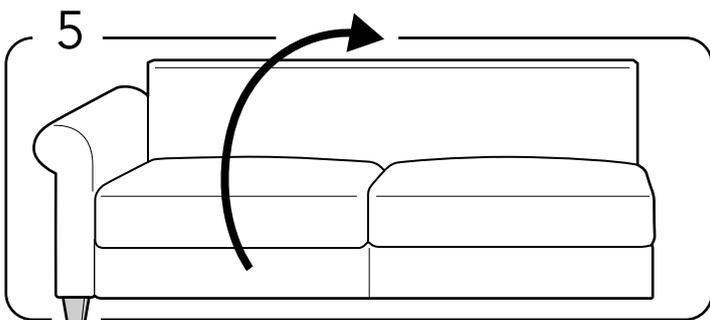


Turn the stationery to the backside.

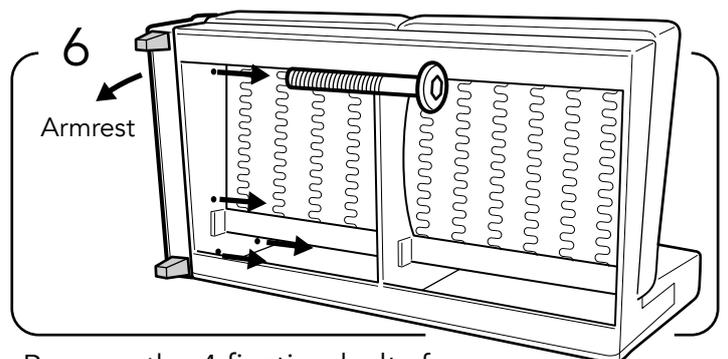


Remove the 4 fixing bolts from inside the stationery.

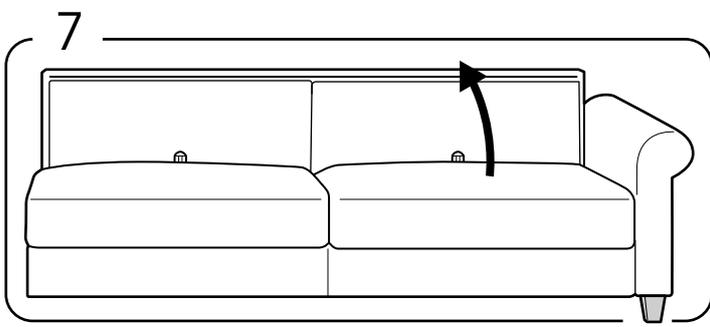


7
Open the bed mechanism that are next to the armrest.

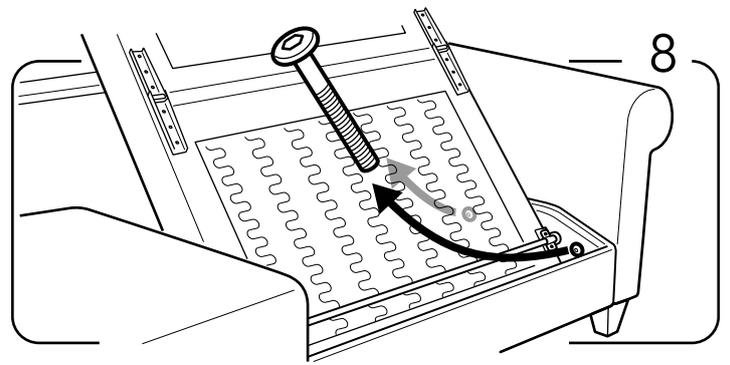


8
Remove the 2 frontside armrest fixing bolts.

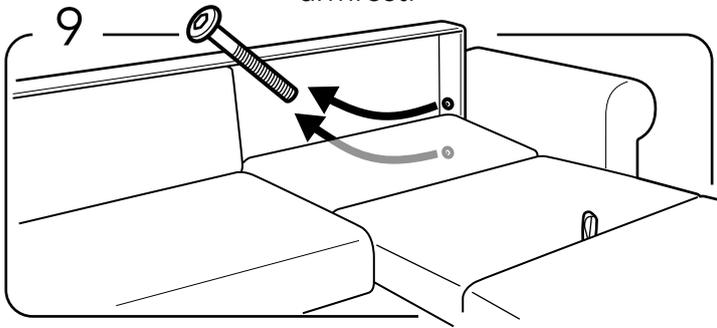


9
Put down the bed mechanism and remove 2 backrest fixing bolts.

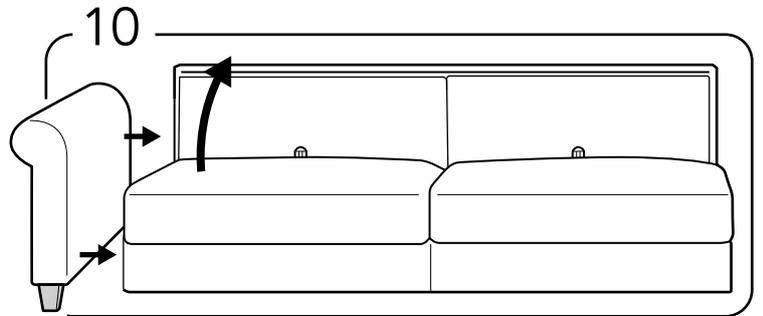


10
Relocate the opposite armrest in the other direction and start to attach it by opening the bed mechanism.

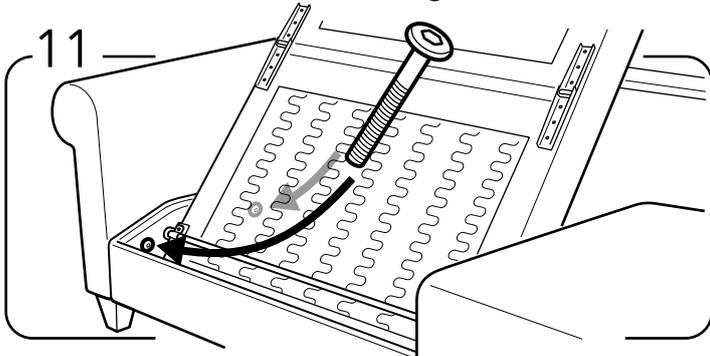


11
attach the 2 frontside armrest fixing bolts.

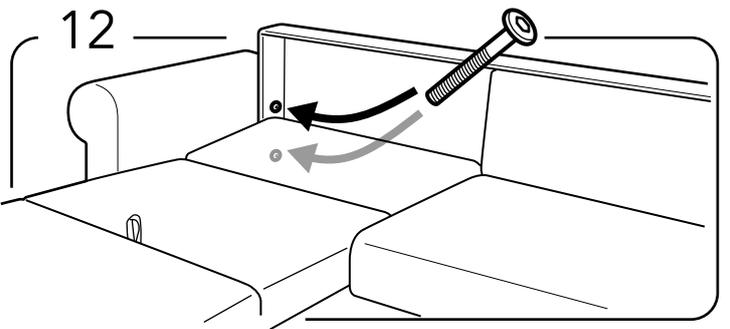


12
Put down the bed mechanism and attach the 2 backrest fixing bolts.

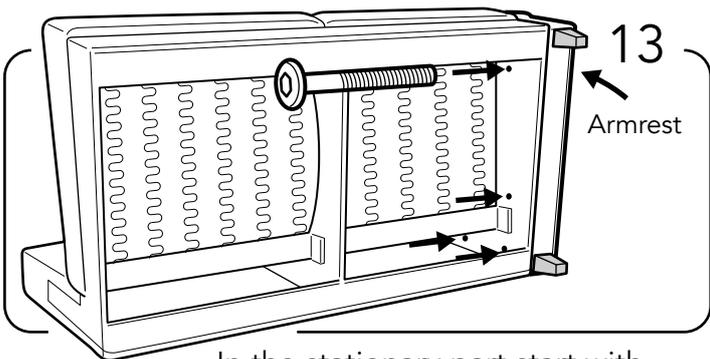

13
Armrest
In the stationary part start with relocate the armrest in the opposite side and attach it with the 4 bolts as shown.

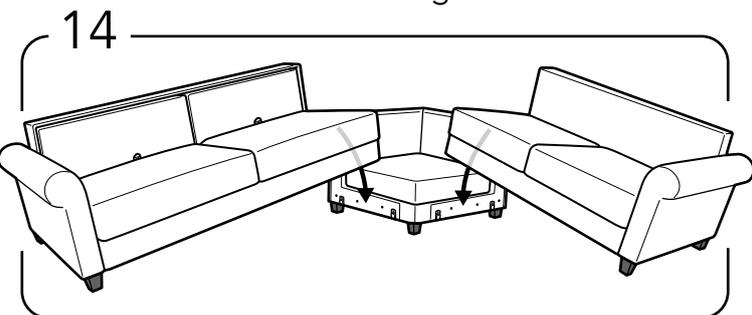

14
Attache the bed and the stationery parts to the corner part inside the pre-installed anchors.

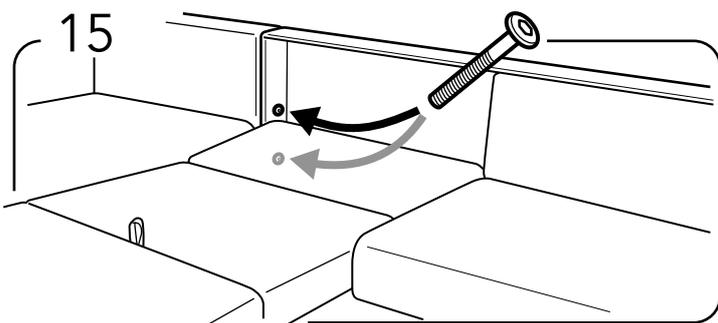

15
Put down the bed headside part and attach the bed backside to the corner part.



This is how the final product should look like.